




**BE SEEN - BE SAFE**

# TF 510 Series Beacon

## 2 in 1 Beacon

- Flashing Hazard Warning
- Torch (Worklight) Function

Body Color:	Yellow
LED Color Options:	8 x Red / 3 x White Worklight
Candela:	30 Red / 200 White
No of LED's:	8 / 3 Worklight
Flash Rate:	165 - 185 fpm
Battery Type:	D Cell x 2 (Not included)
Battery Life:	40 hours
Weight:	450g inc Batteries
Height:	20 cm

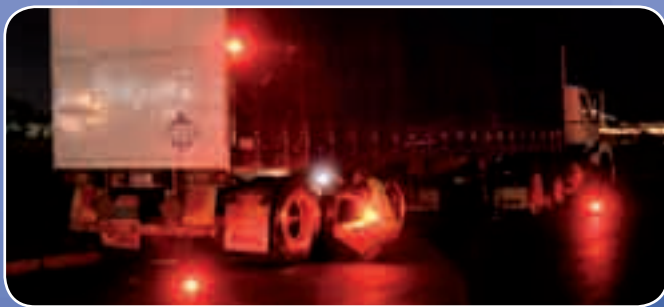

### Flare™ Protector Beacon

[www.flarecorp.com](http://www.flarecorp.com)

- 1 Always use quality alkaline D cells.
- 2 Install new batteries with + terminal towards lens. Do not mix types.
- 3 Make sure cap is tightened as far as possible to engage O-ring.
- 4 To switch beacon on, rotate lens clockwise; off, counter-clockwise.
- 5 Stand beacon vertical in base on a firm surface, or use cone mount kit.
- 6 Replace batteries when yellow LSO indicator lights up.



**Cone Mount Clip**

Attaches to any Eflare Beacon to enable vertical positioning of the beacon on most types of cones.



**Magnetic Clip**

Attaches to any Eflare Beacon.  
Not suitable for moving vehicles.



**Suction Clip**

Attaches to any Eflare Beacon for use on all smooth surfaces.  
Not suitable for moving vehicles.



**Daylight Hood**

Attaches to any 500 Series Eflare Beacon.  
For limiting spread of light beam.



**Rubber Base Mount**

General purpose mount for all Eflare Beacons.



**Aviation Base Mount**

Secure mount for special purposes.



**Magnetic Base Mount**

Combined Magnetic Base and Cap.  
Can be used with any Eflare Beacon.  
Rated to 80 KPH when securely mounted on vehicle.



**Floatation Collar**

Fits any 500 series beacon.  
Provides reliable self-righting buoyancy for marine use.

*Other product information  
available from our website  
[www.eflarecorp.com](http://www.eflarecorp.com)*

*Distributed by:*